



DT-24C Dishwashing Trailer

1. Top View

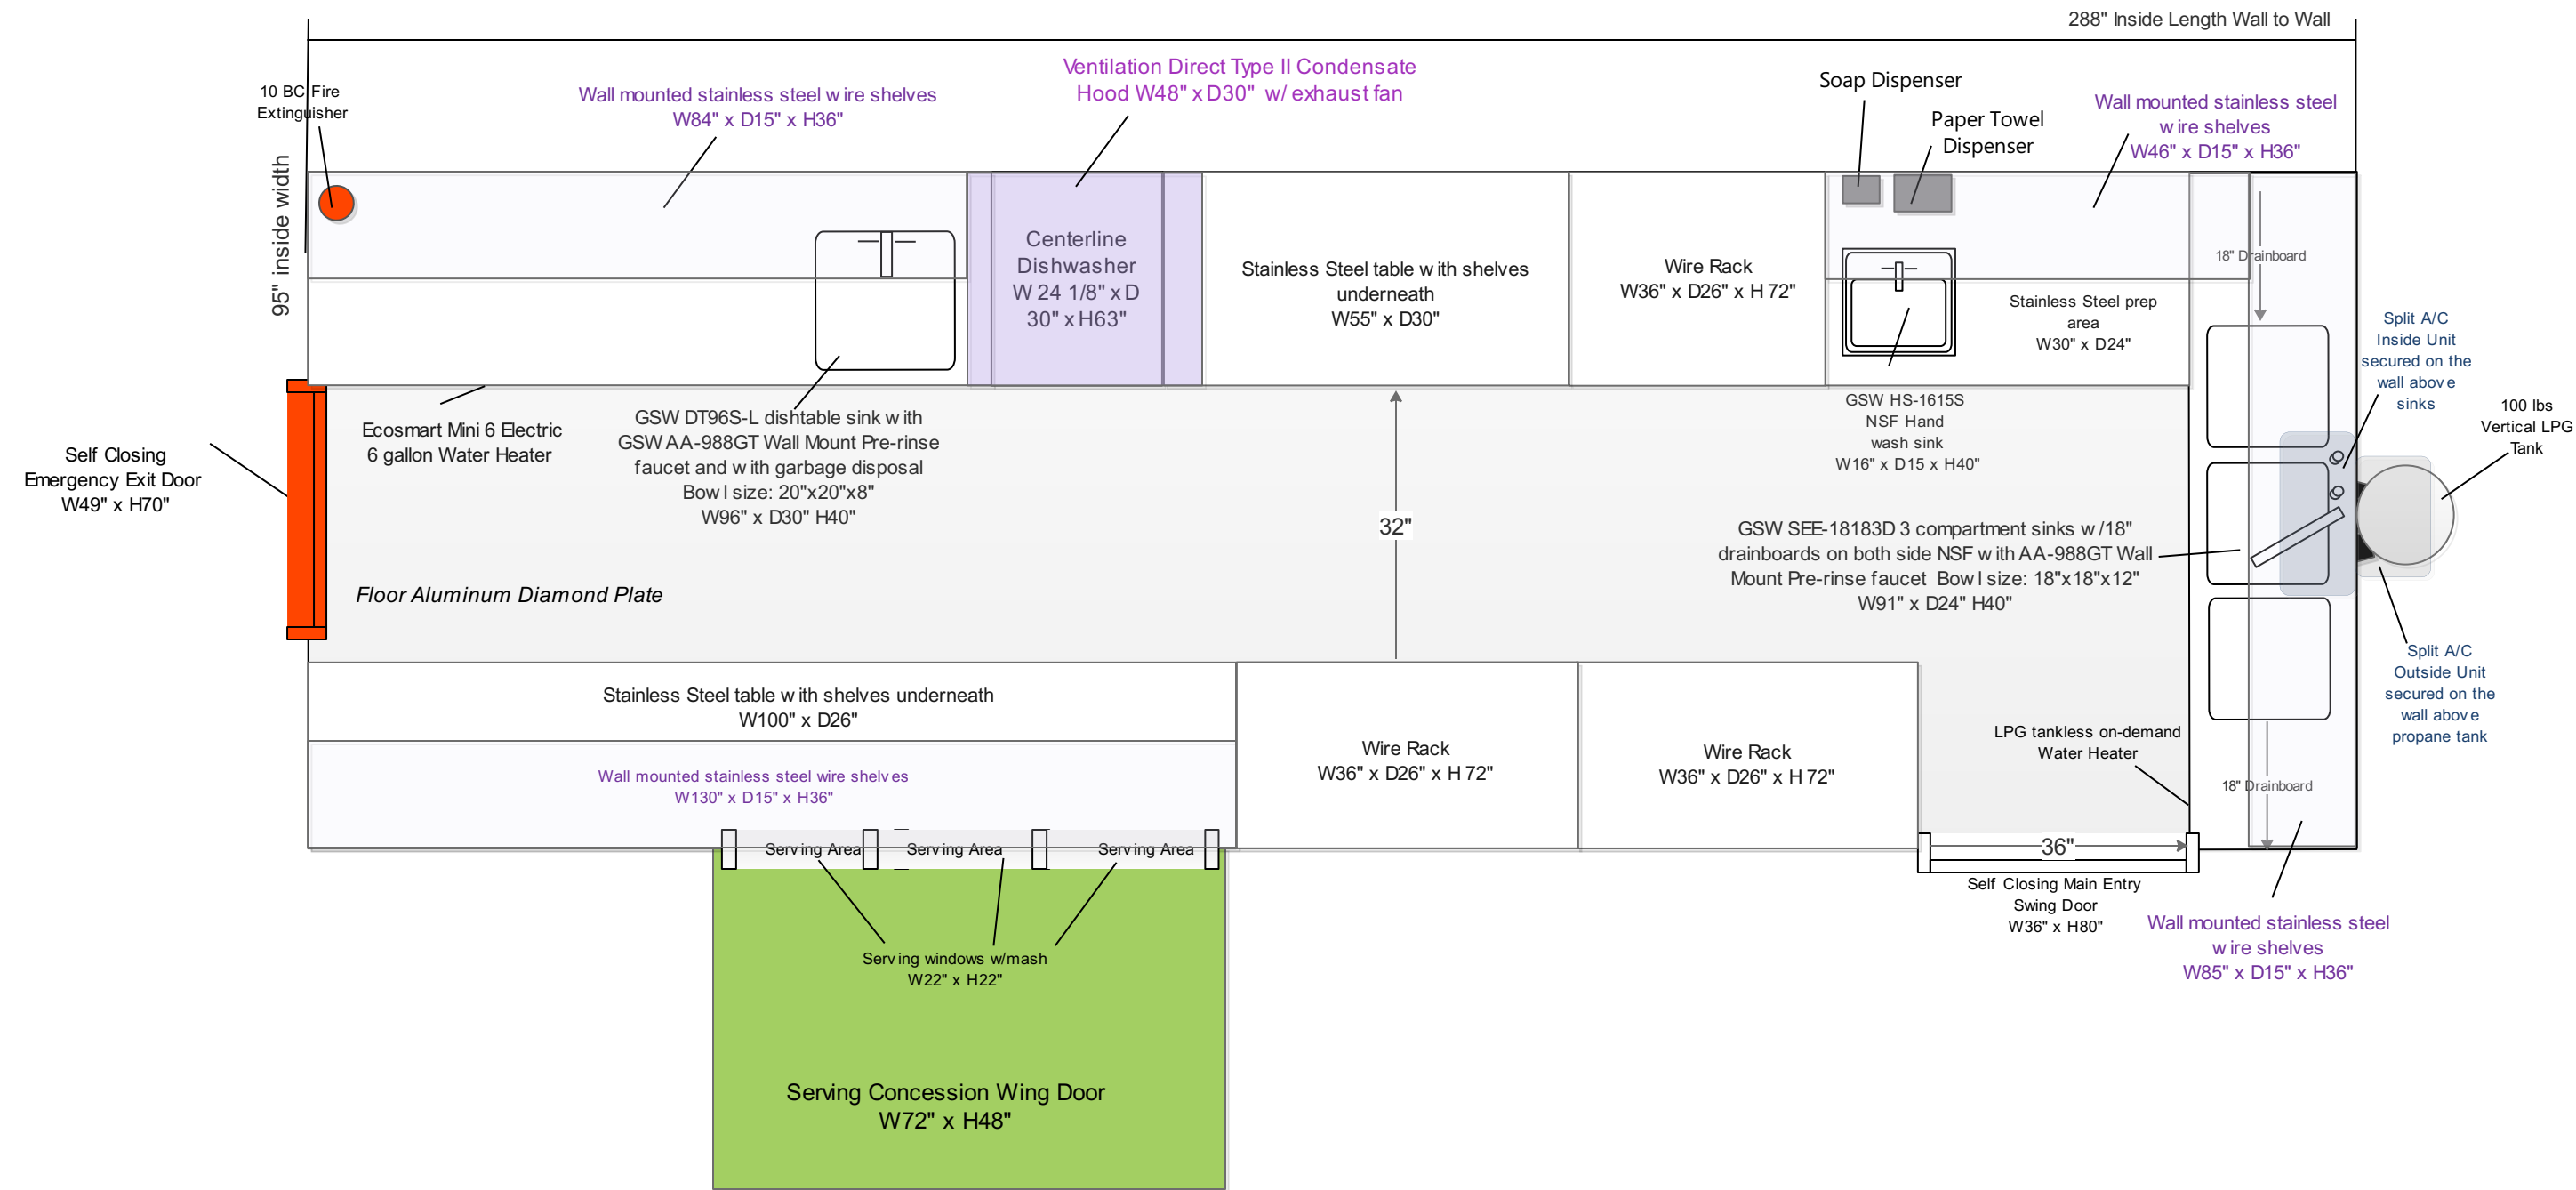


- Description:**
- All submitted plans are scaled of 1/2"=1'
 - 1/8" Aluminum diamond plate will be used for the floor.
 - Smooth aluminum or stainless steel sheet metal will be used for wall and ceiling
 - 4" high 3/8" radius aluminum molding extended to the wall will be used
 - NSF approved food graded silicon will be used to fill connections of cabinets, walls etc.
 - Aluminum diamond plate floor will be welded to fill gaps and connections to make it water resist
 - Specification sheet has been attached for all equipment used
 - All stainless steel cabinets installed with security latch to ensure doors reliability while moving
 - Shurflo water pump will be used model#: 2088-422-144, water delivery range 1.5-2.8 GPM.
 - Wash down hose is located under the 3 compartment sink in custom built stainless cabinet. The length of the hose is as long as the truck
 - Preparation area is stainless steel smooth and cleanable
 - Hand wash sink bowl size is 14" x 10" x 6"
 - All appliances are NSF approved (please see NSF letters attached)
 - Trailer inside height is 84"
 - Shatterproof LED light will be used
 - All equipment mounted securely to the framing structure and/or counter top.
 - All equipment are sealed to floor or have minimum 6" cleaning space under.

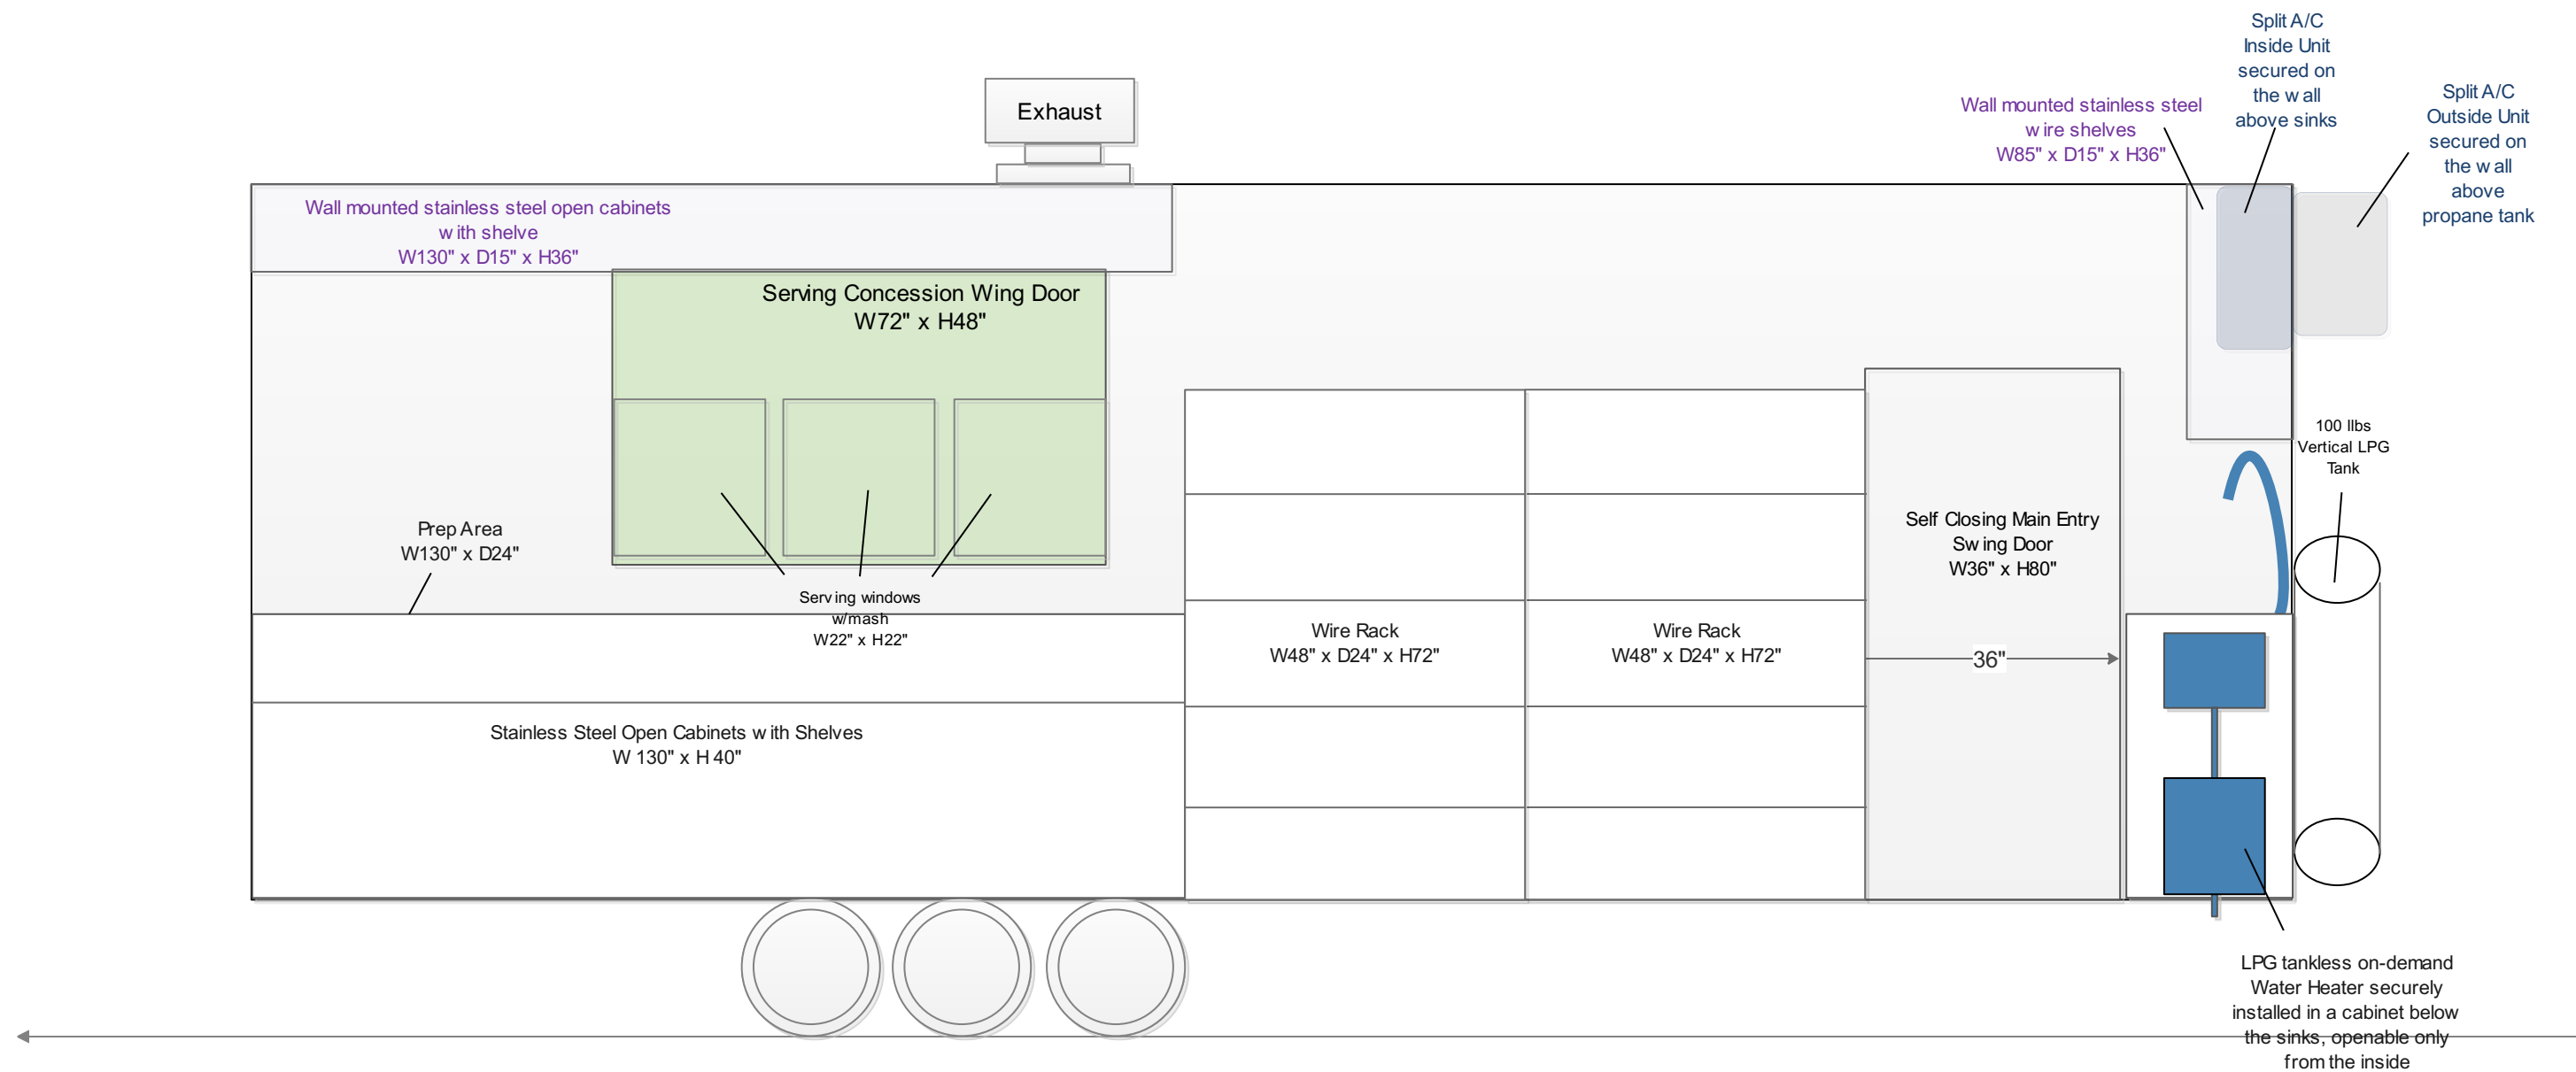


Description:

- Under sinks area will be covered with stainless steel and door.
- Washdown hose is equipped with pistol grip hose nozzle

3. Passenger Side Exterior View

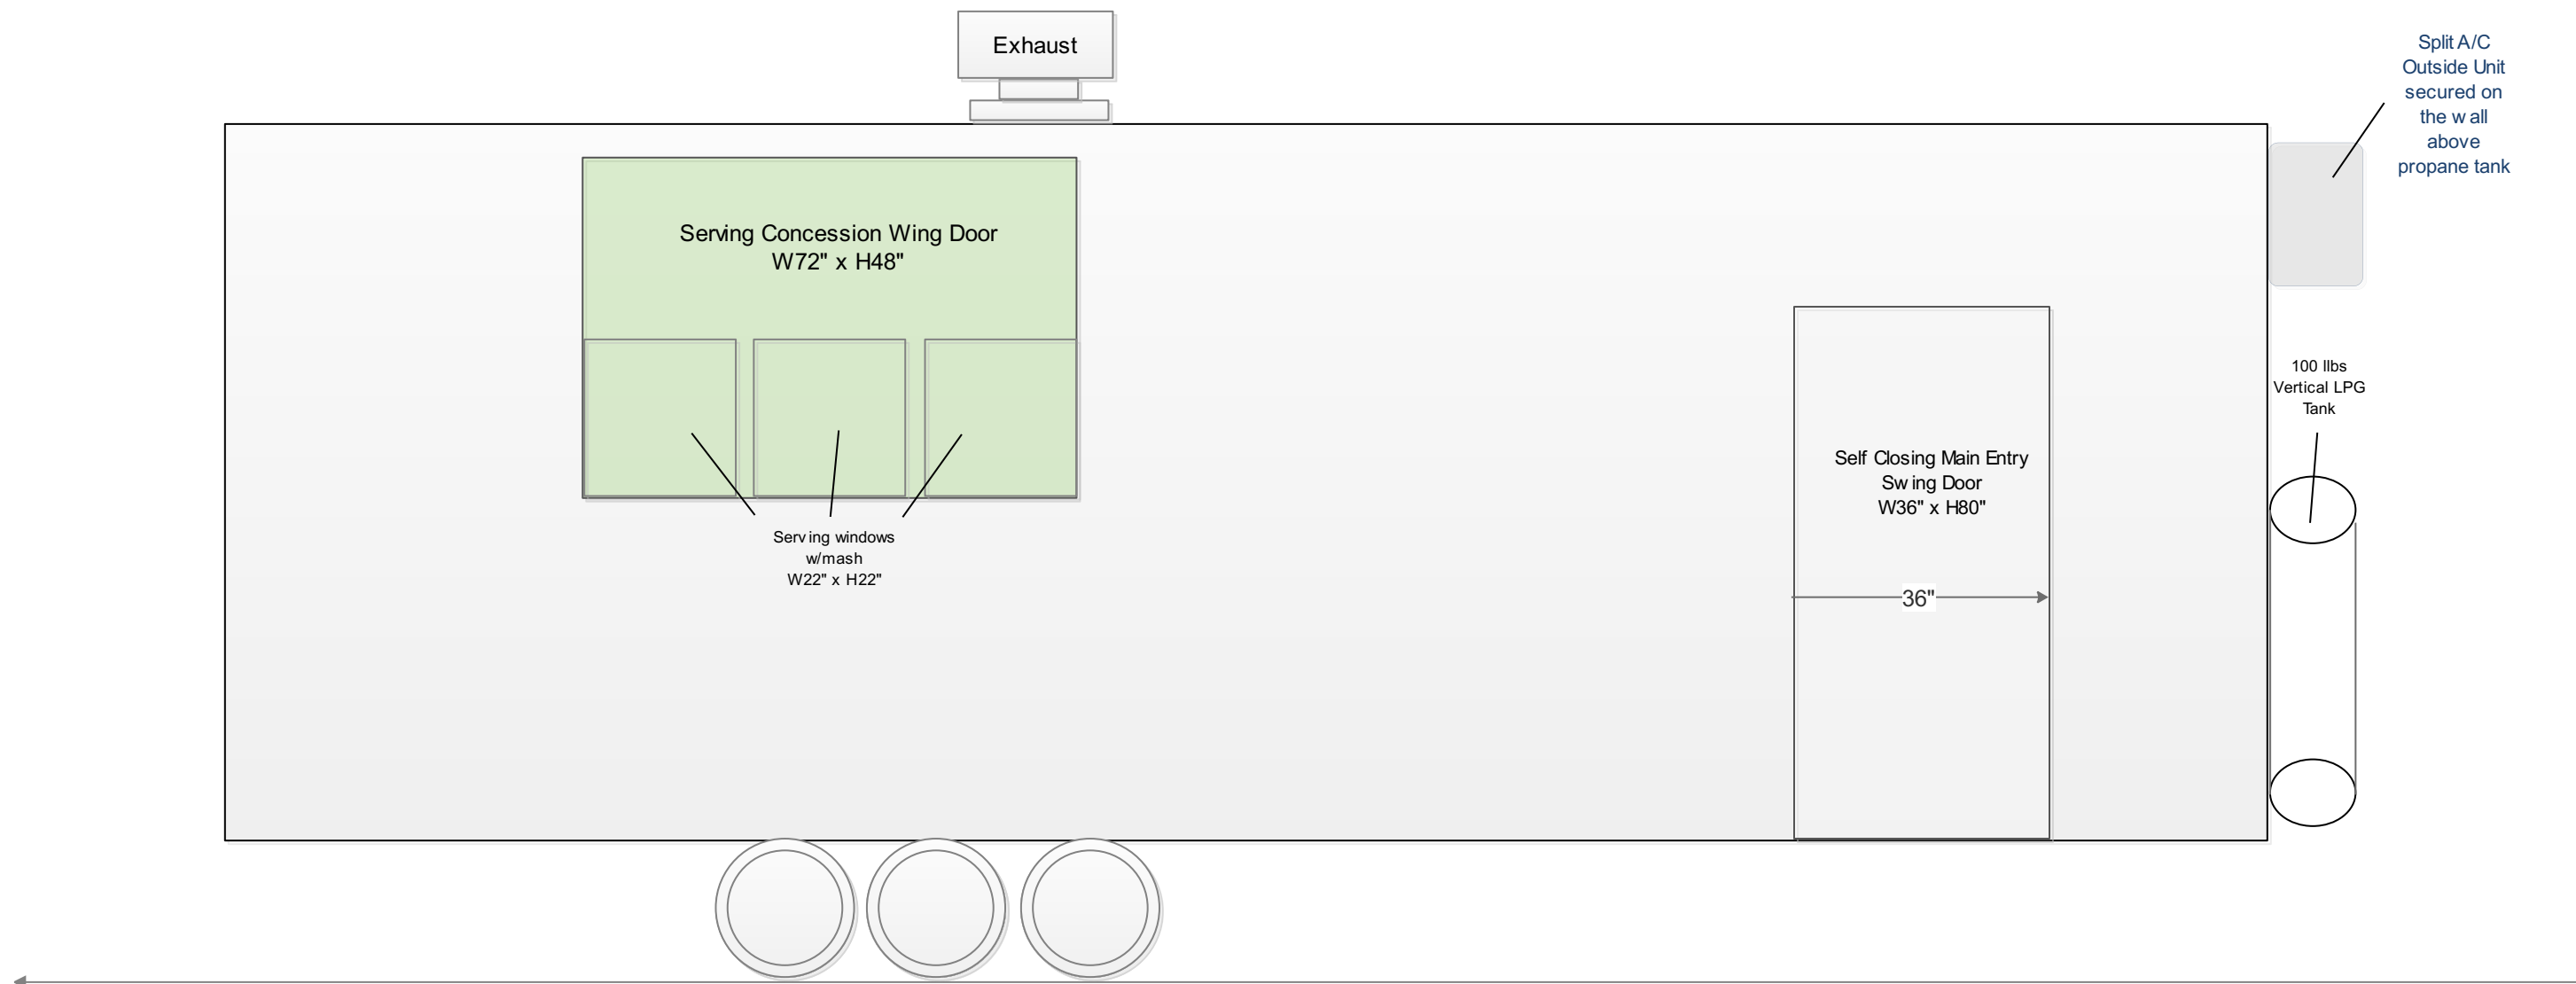


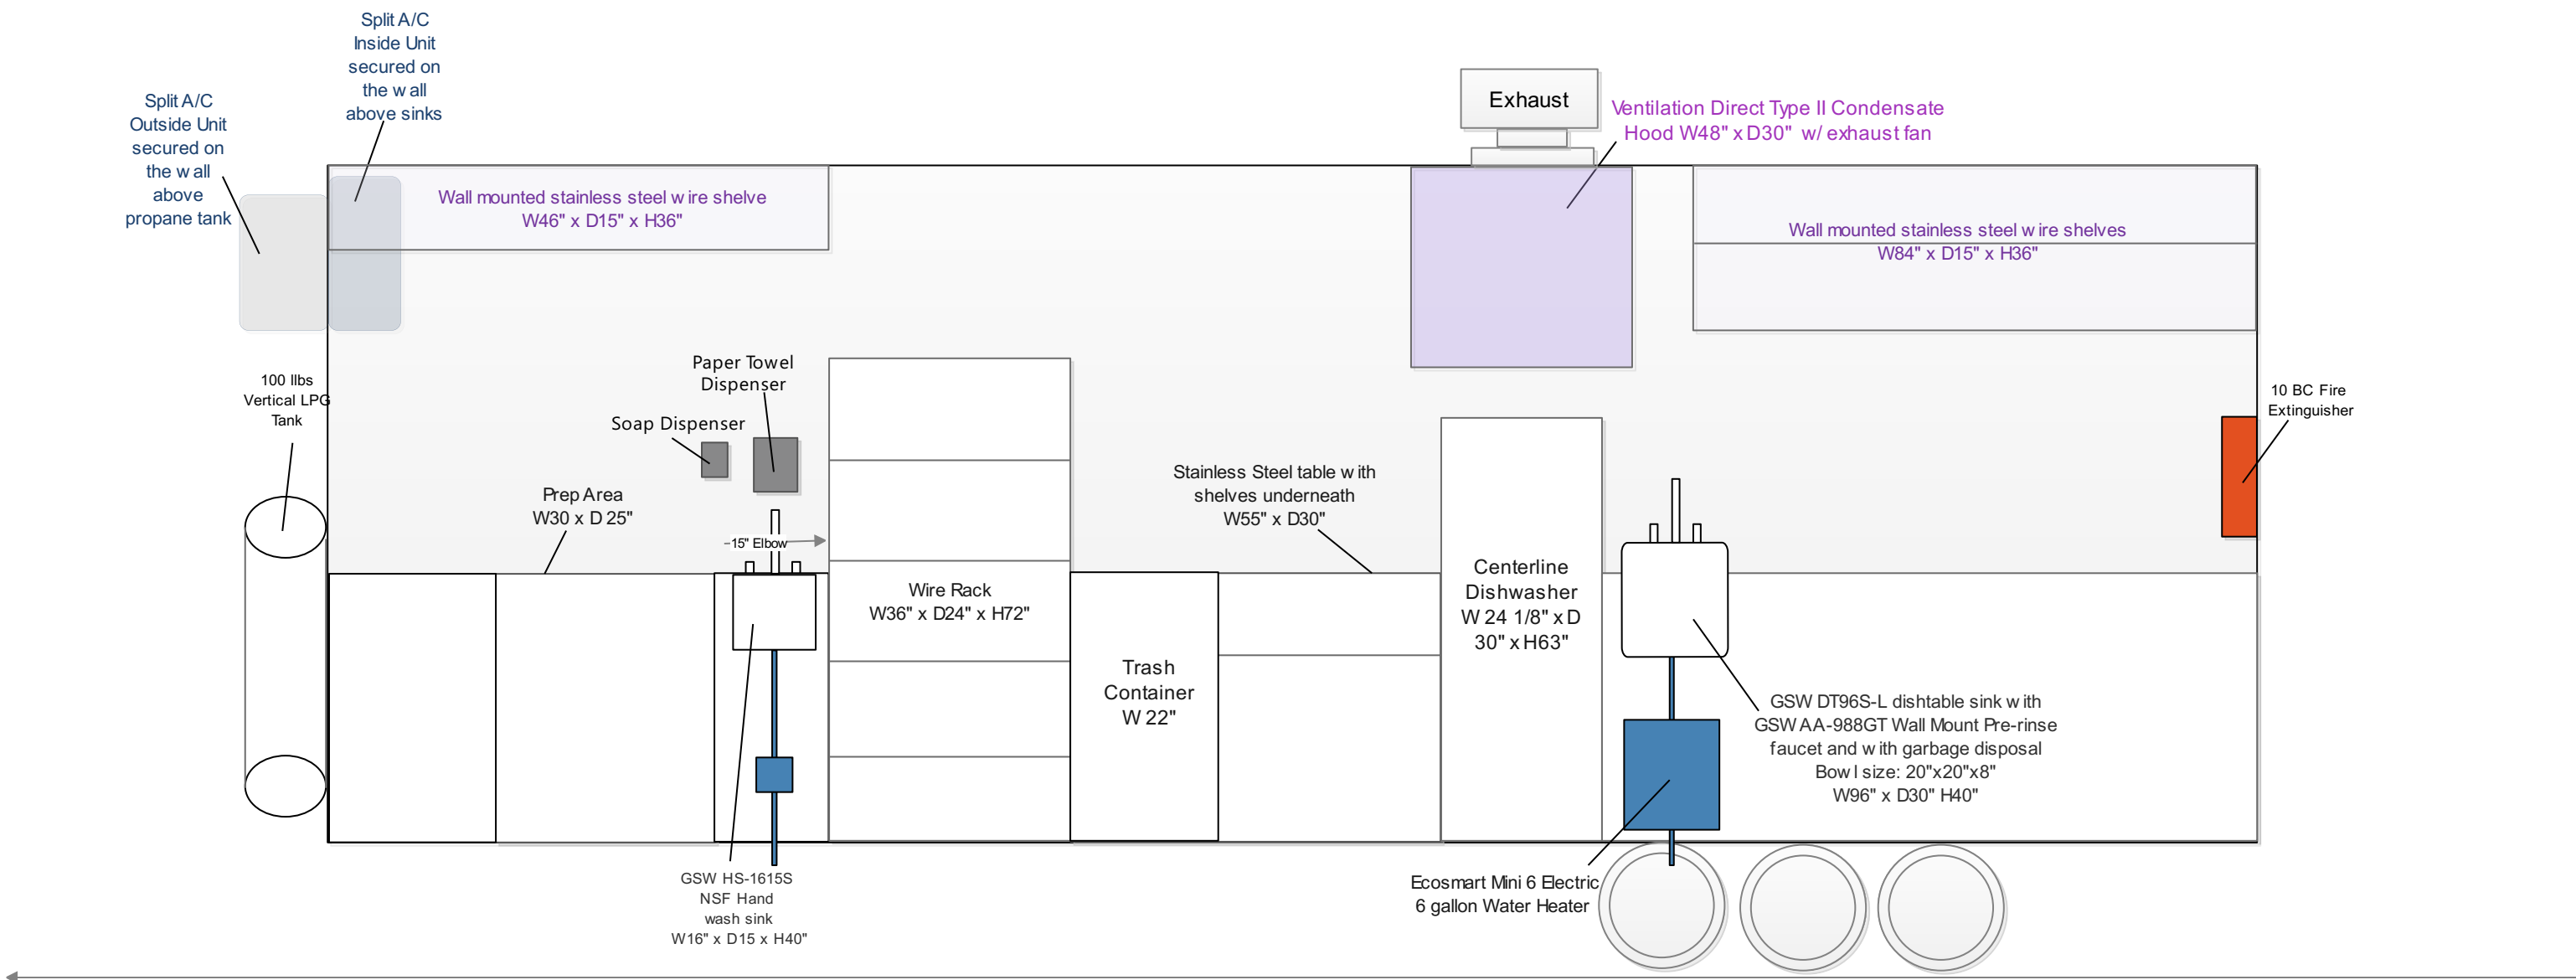



DT-24C Dishwashing Trailer

6. Plumbing View

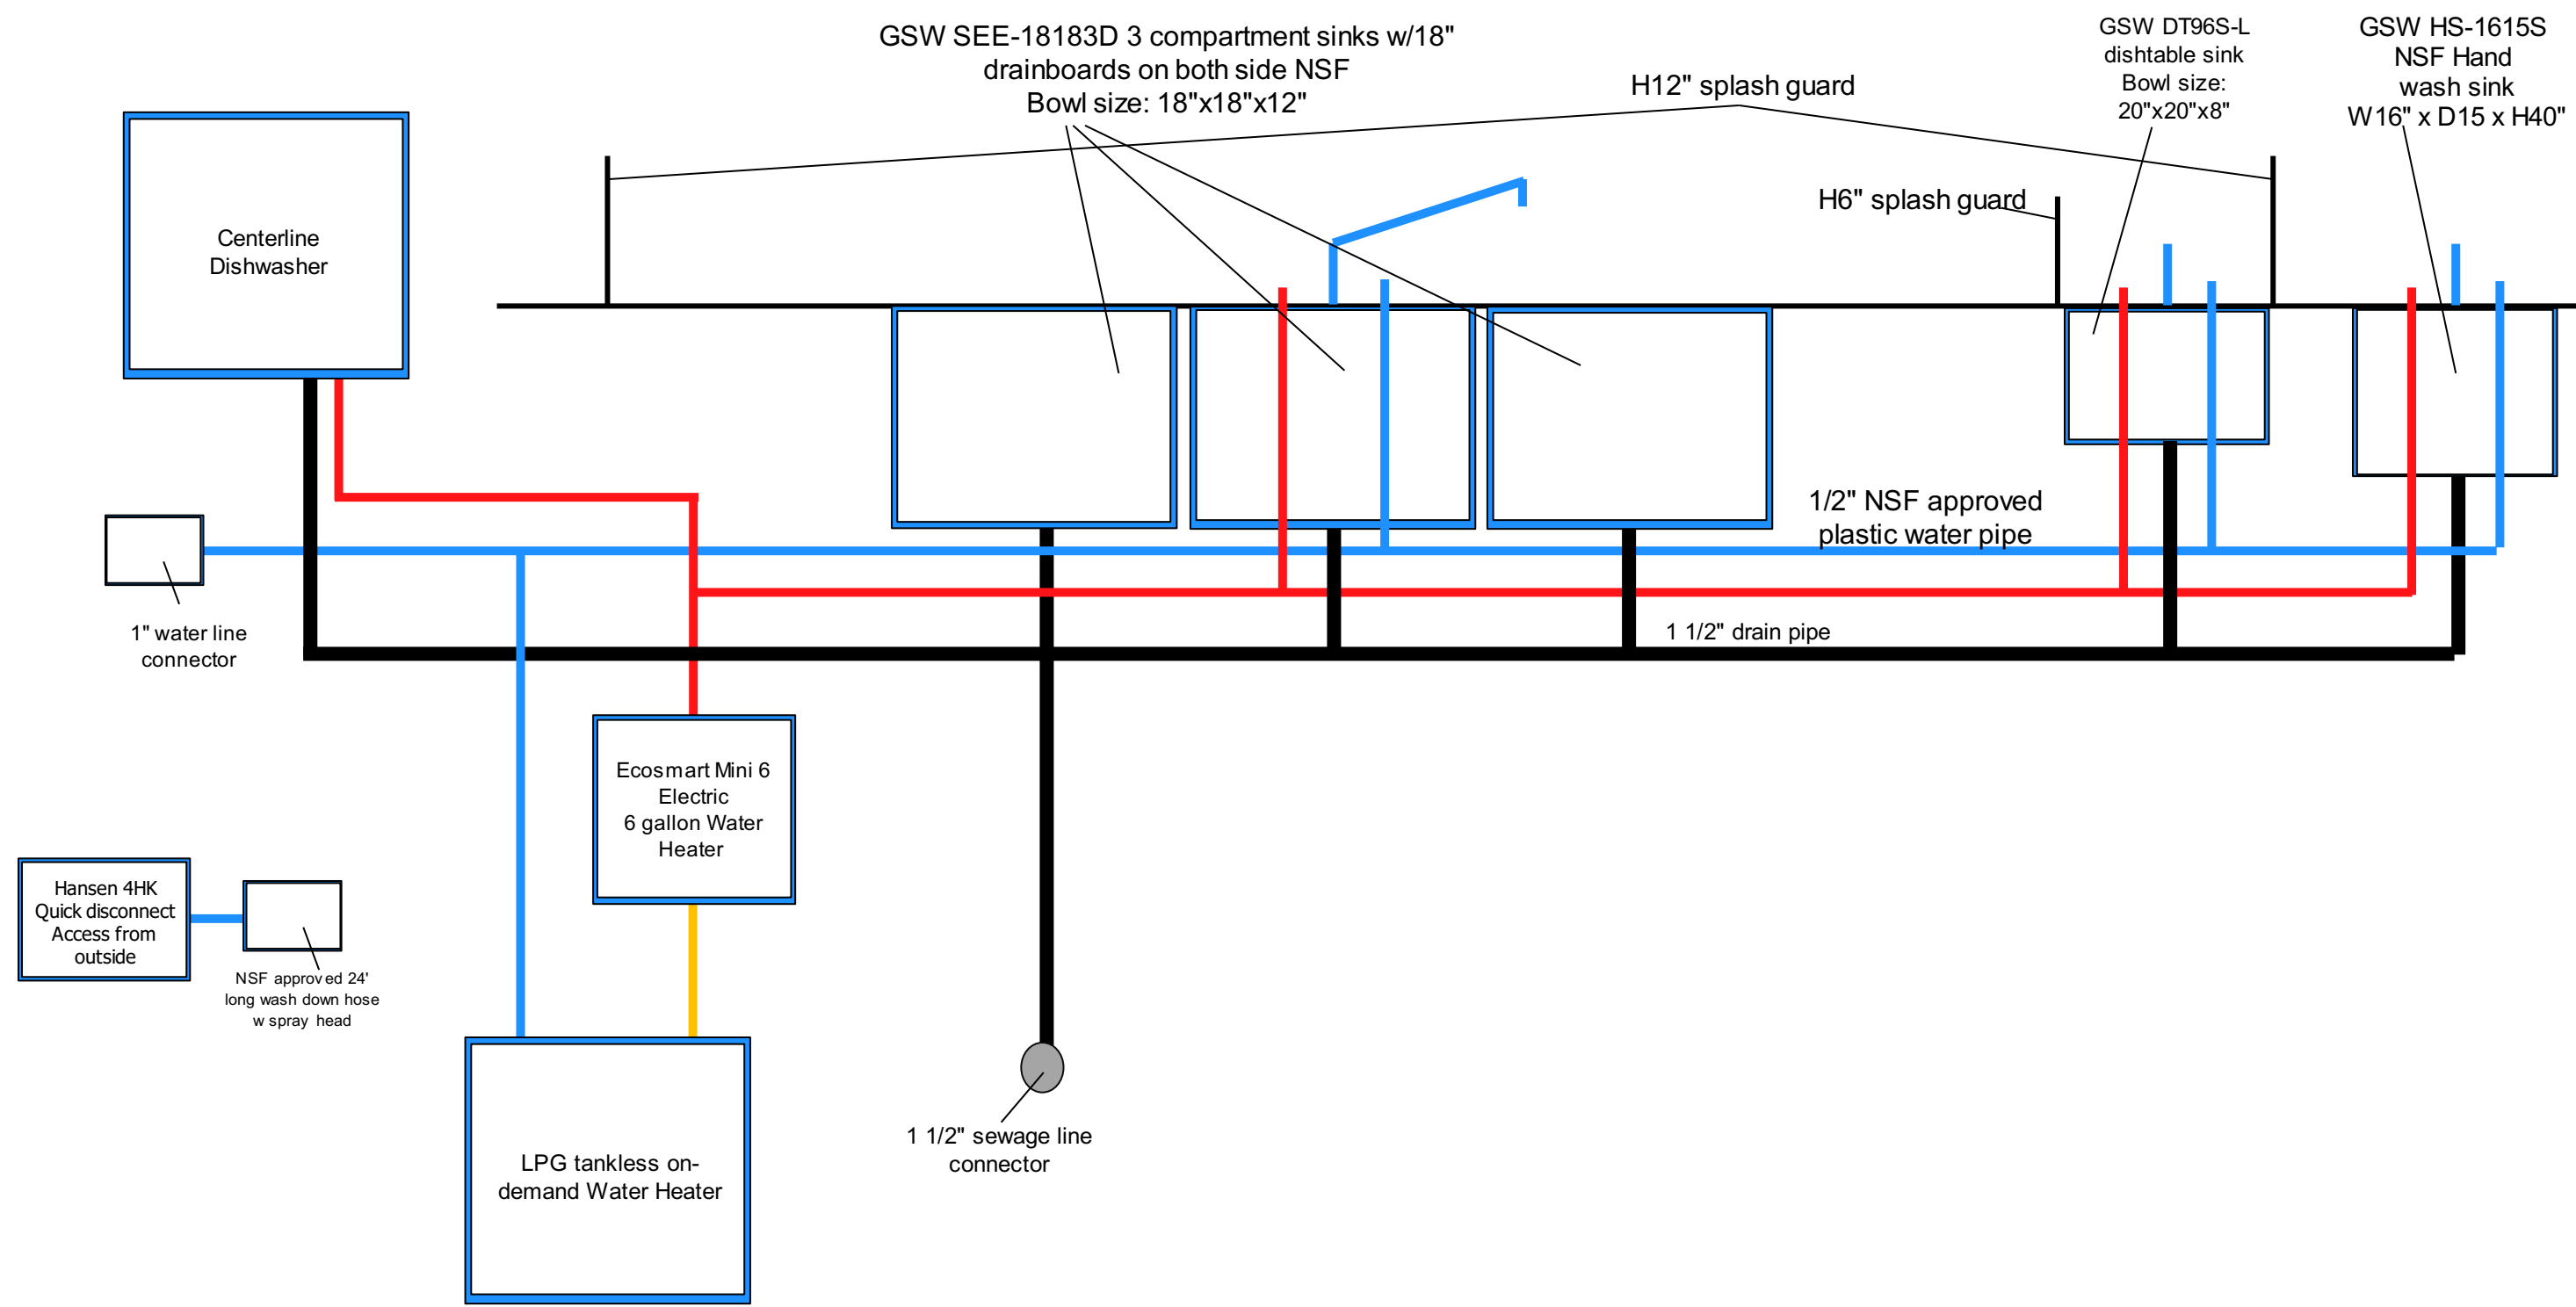

7. Front Side Exterior View

