



KT-32K Trailer

1. Top View

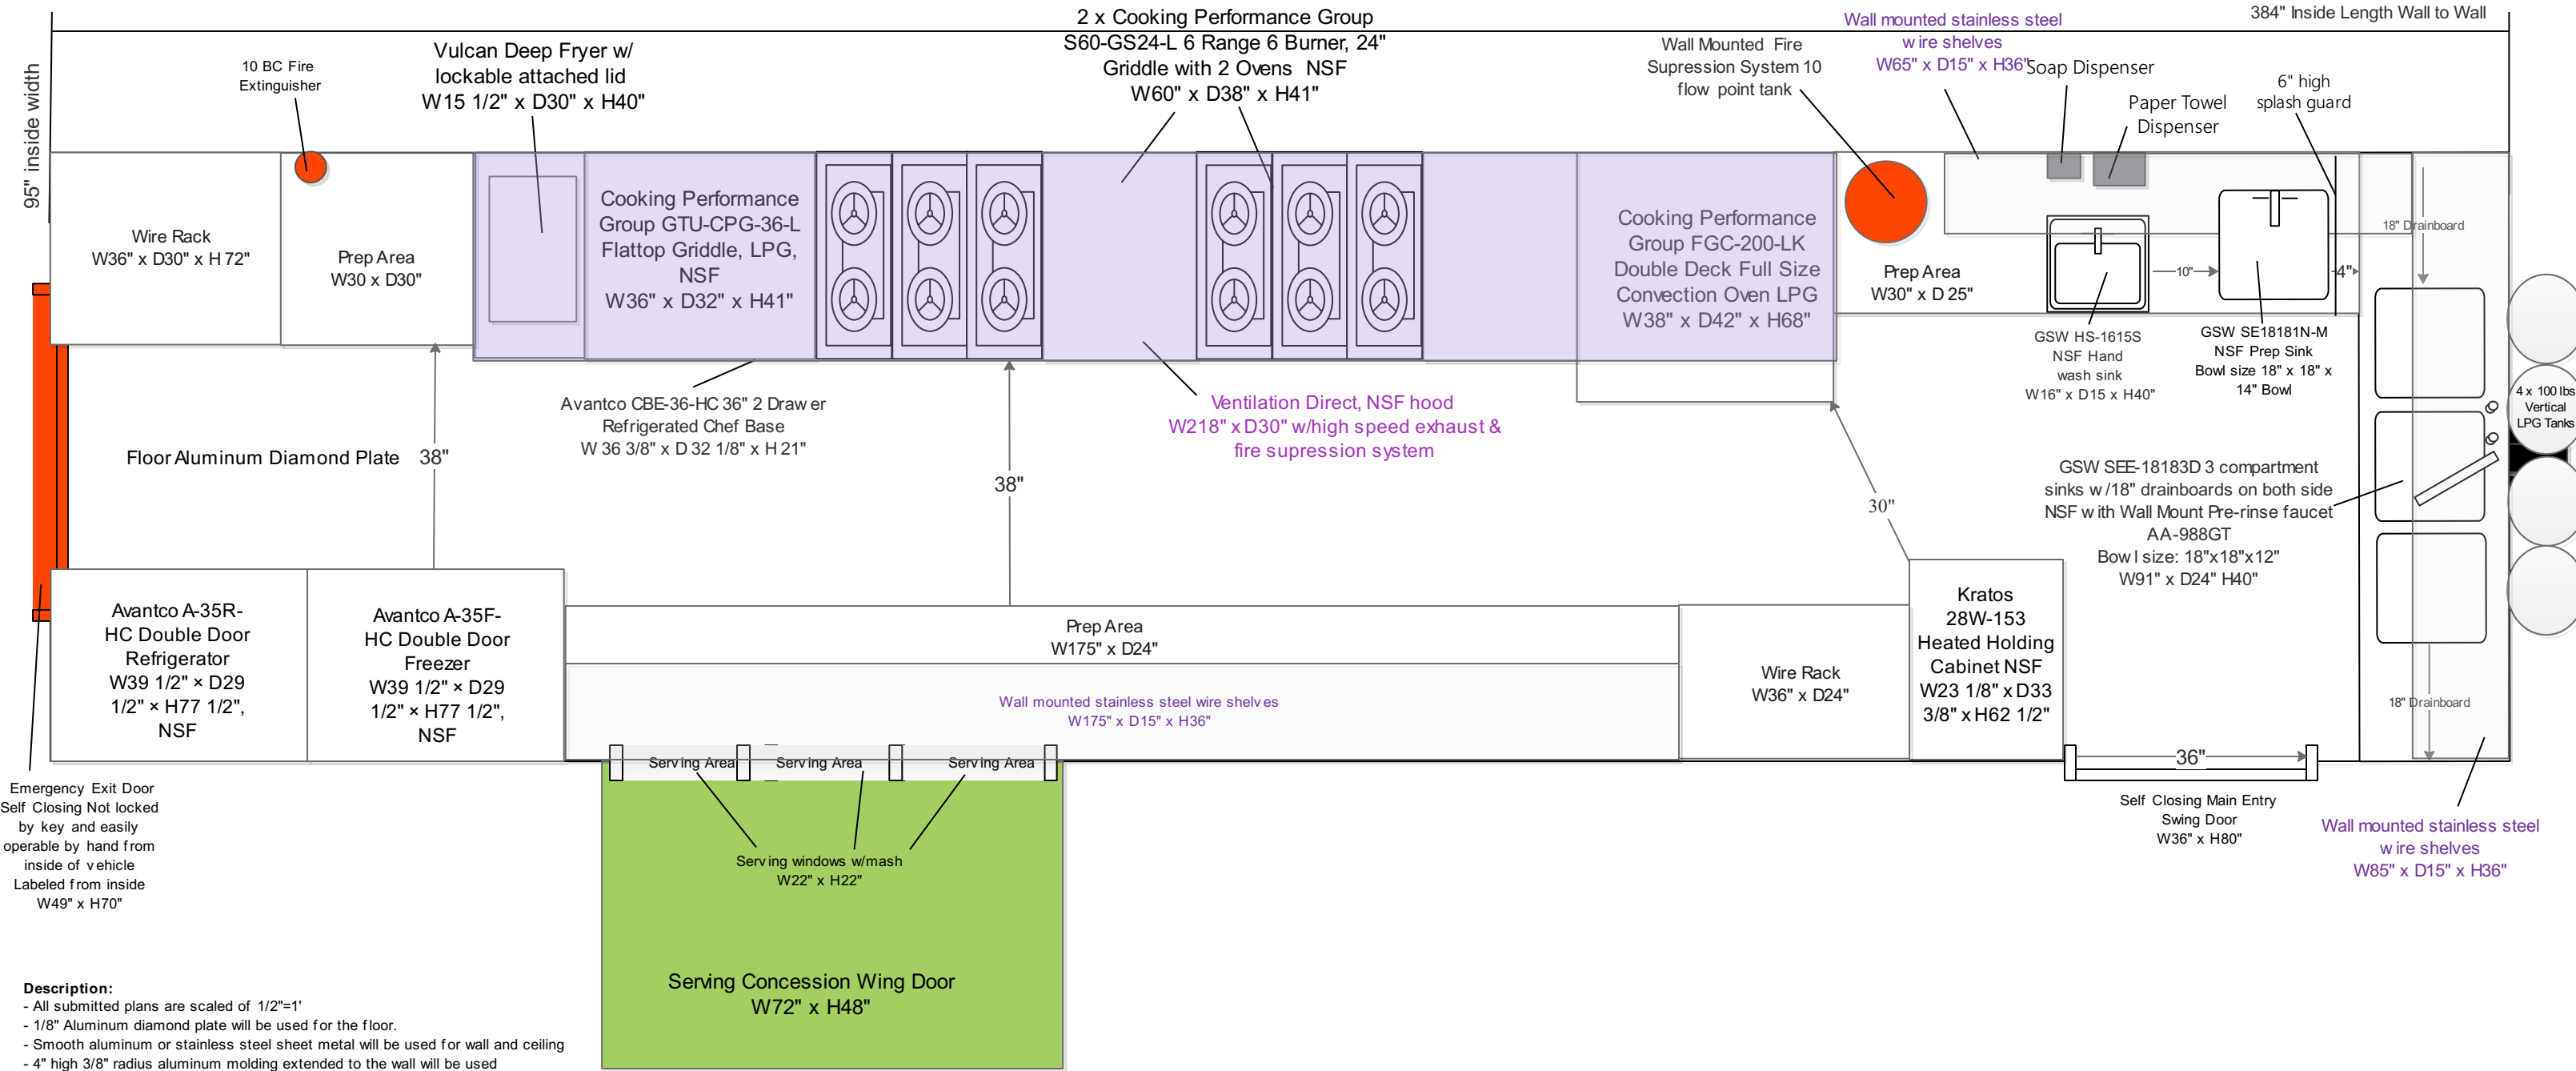



- Description:**
- All submitted plans are scaled of 1/2"=1'
 - 1/8" Aluminum diamond plate will be used for the floor.
 - Smooth aluminum or stainless steel sheet metal will be used for wall and ceiling
 - 4" high 3/8" radius aluminum molding extended to the wall will be used
 - NSF approved food graded silicon will be used to fill connections of cabinets, walls etc.
 - Aluminum diamond plate floor will be welded to fill gaps and connections to make it water resist
 - Specification sheet has been attached for all equipment used
 - All stainless steel cabinets installed with security latch to ensure doors reliability while moving
 - Shurflo water pump will be used model#: 2088-422-144, water delivery range 1.5-2.8 GPM.
 - Potable water inlet is 1" above overflow
 - 218" Type I hood has been provided
 - Utensil drawer is smooth and has rounded corners and can be easily pull out for cleaning
 - sanitizing buckets are mounted to the cabinet shelfe and they have covers to prevent spillage while vehicle is in motion
 - Wash down hose is located under the 3 compartment sink in custom built stainless cabinet. It is not located above any food equipment. The length of the hose is as long as the truck
 - Preparation area is stainless steel smooth and cleanable
 - Hand wash sink bowl size is 14" x 10" x 6"
 - All appliances are NSF approved (please see NSF letters attached)
 - Trailer inside height is 84"
 - Shatterproof LED light will be used
 - All equipment mounted securely to the framing structure and/or counter top.
 - all gas-fired appliances properly insulated in a manner that will prevent excessive heat buildup and/or injury
 - All units will be build to the Los Angeles County Health Code requirement
 - All equipment are sealed to floor or have minimum 6" cleaning space under.

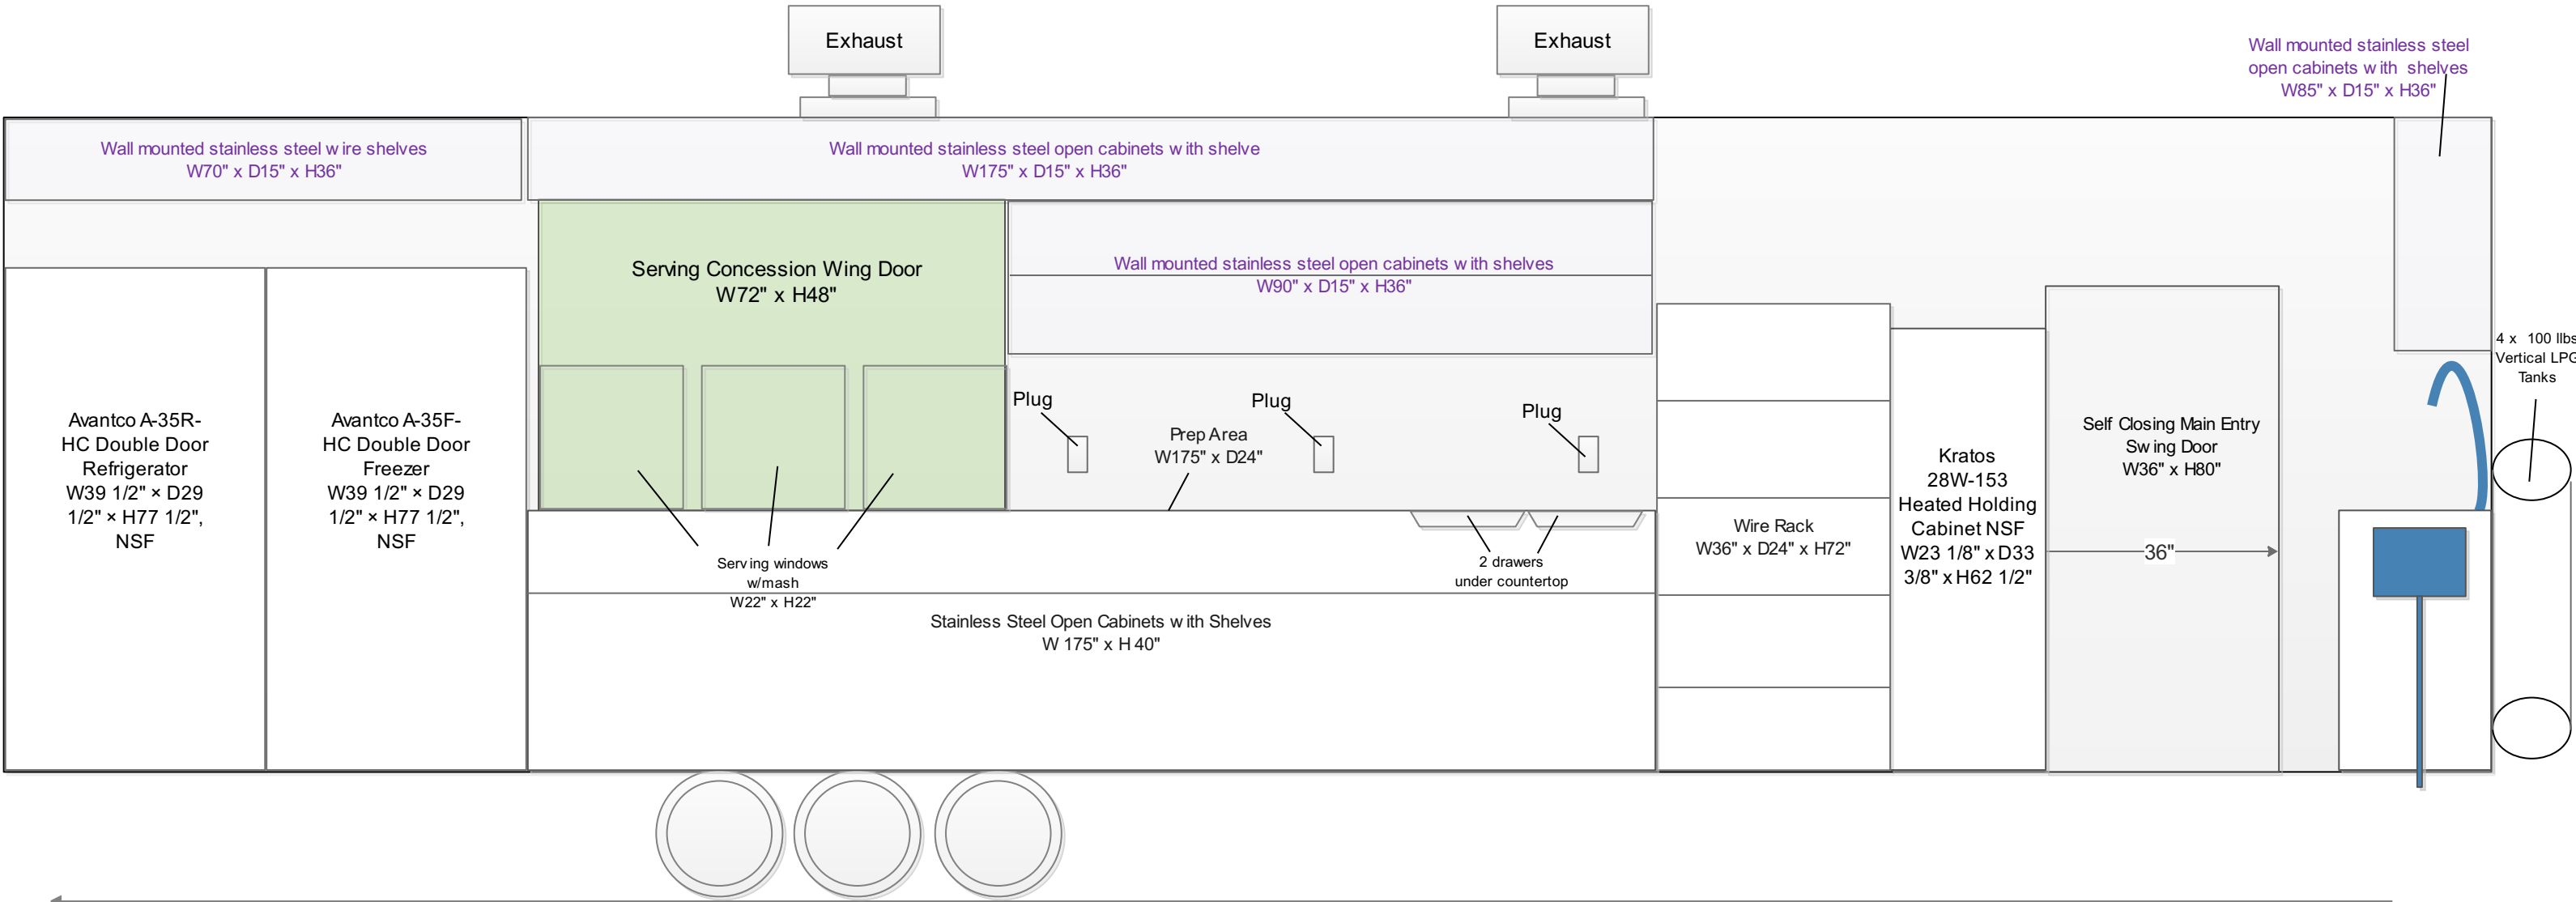


Description:


- Utensil Drawer is easily cleanable stainless steel material.
- Under sinks area will be covered with stainless steel and door.
- Washdown hose is equipped with pistol grip hose nozzle

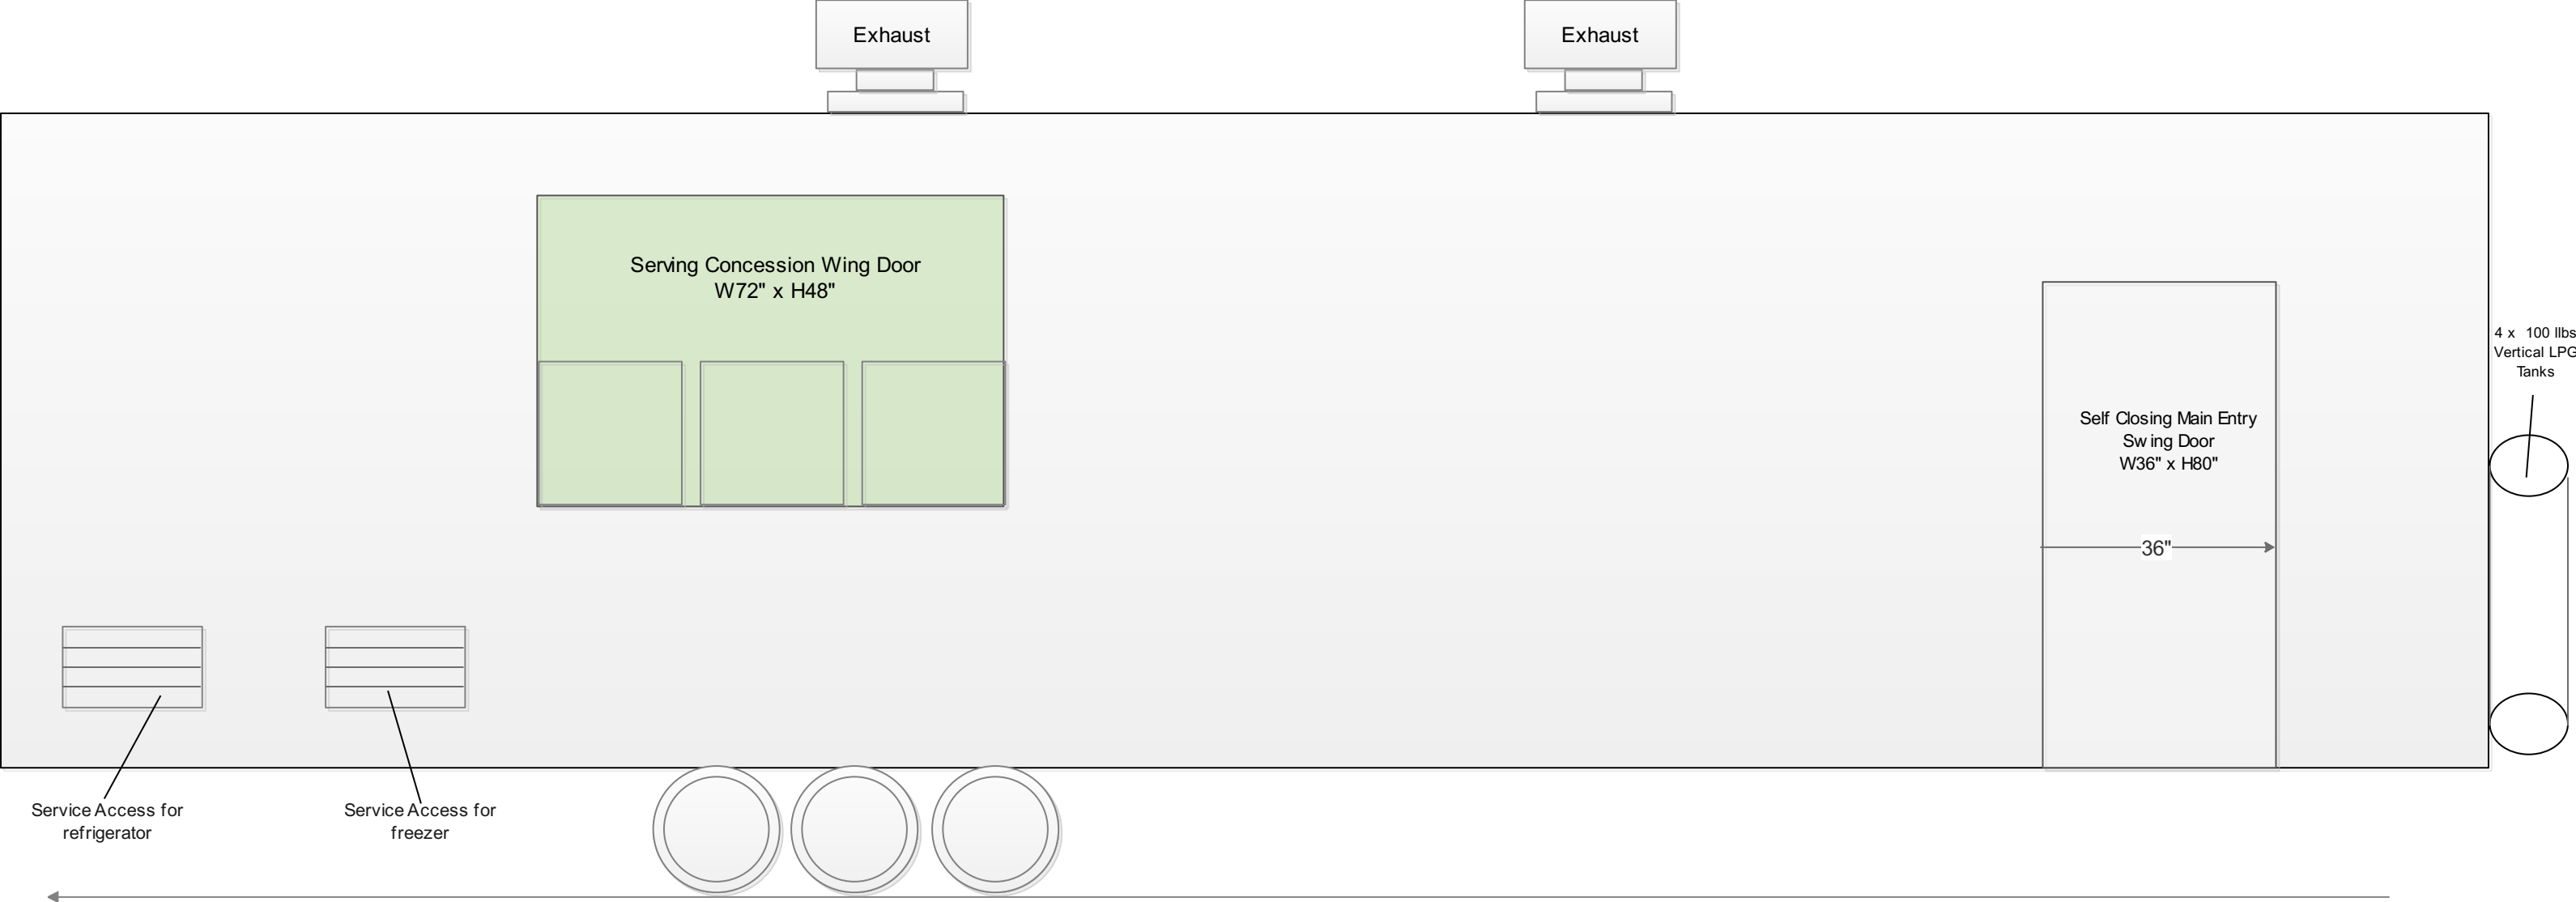

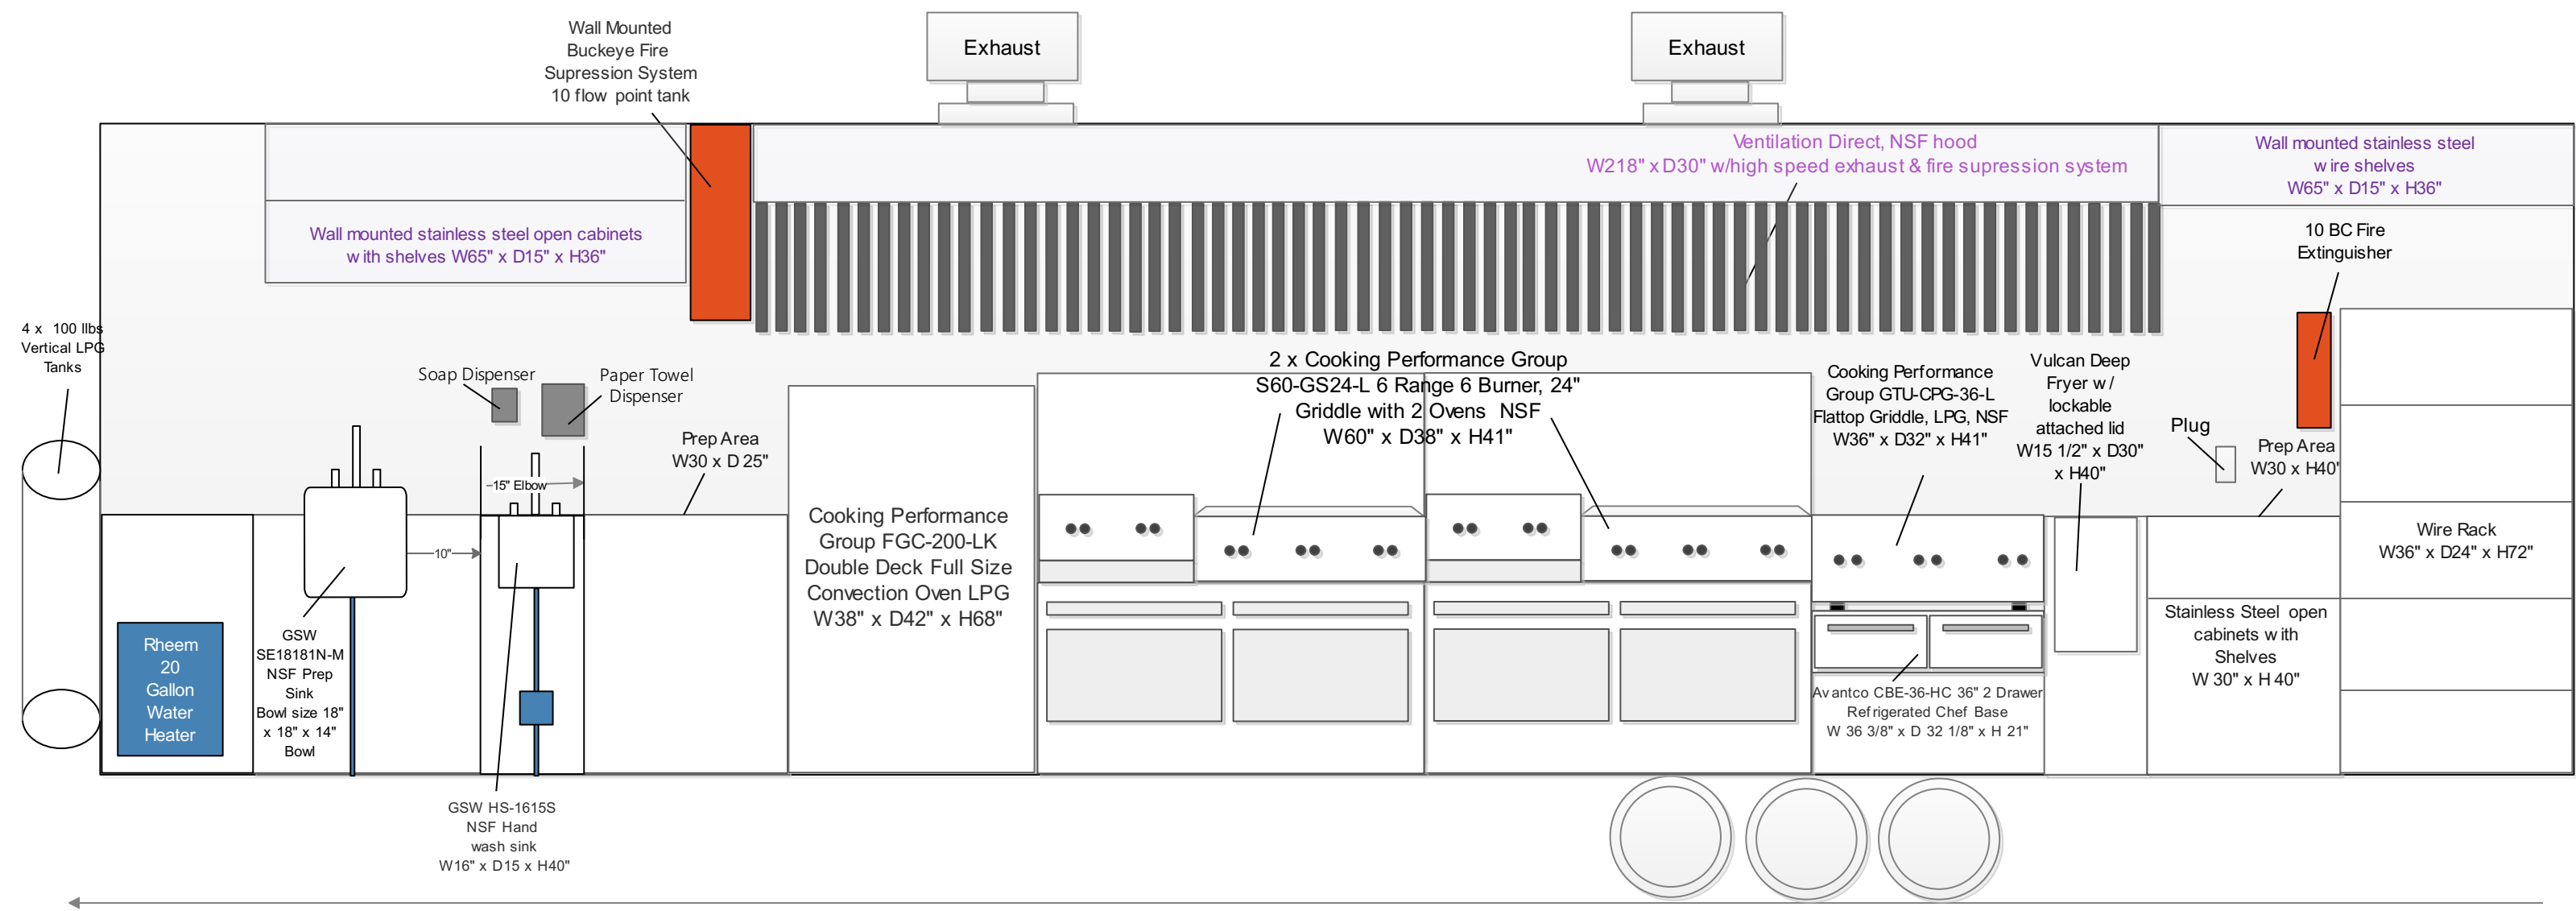


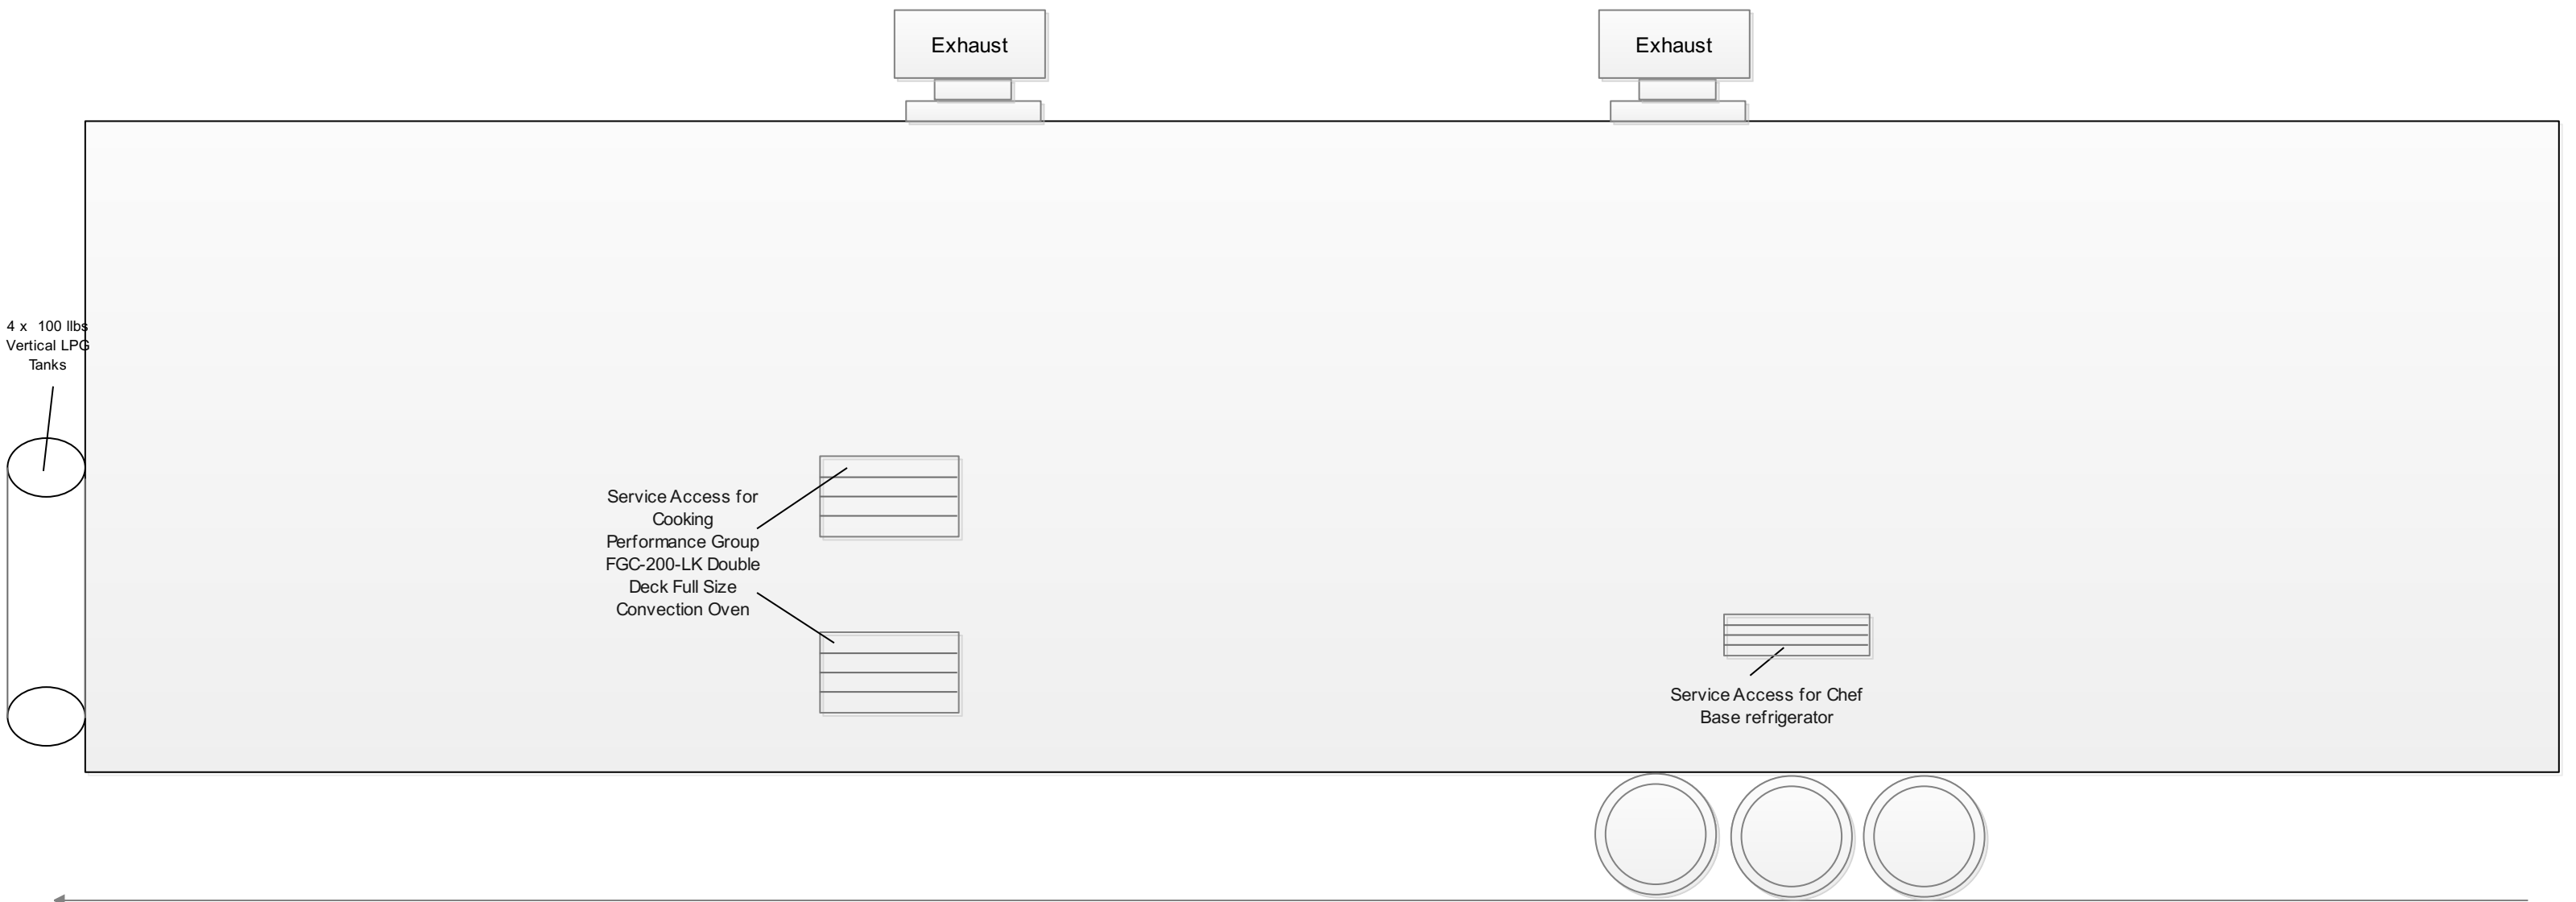

6. Plumbing View

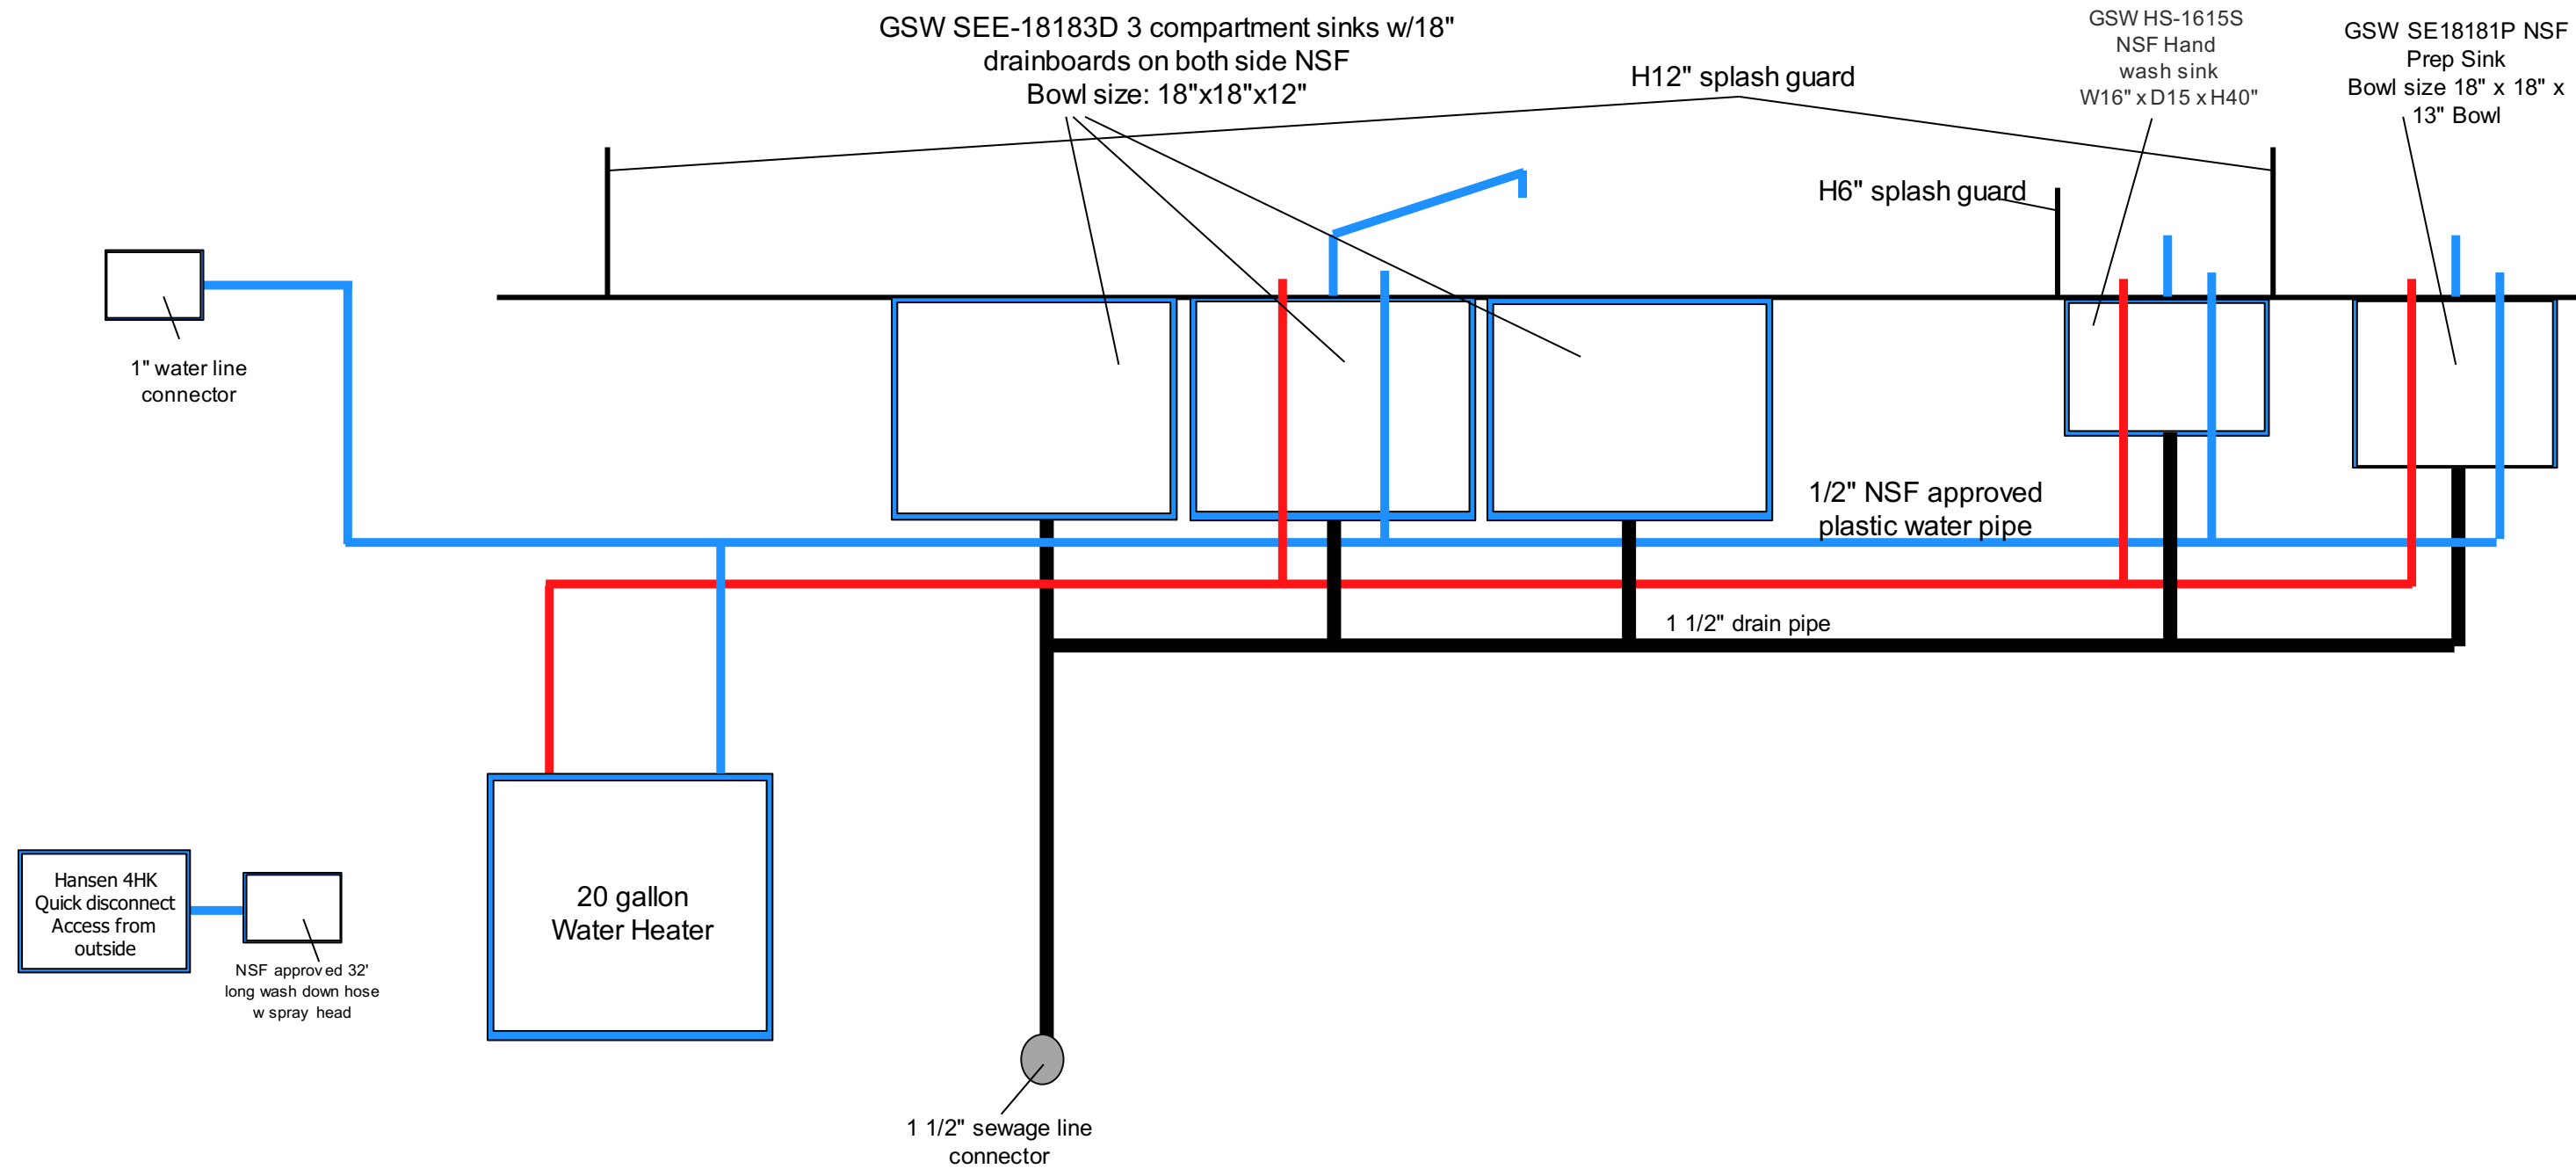

7. Front Side Exterior View

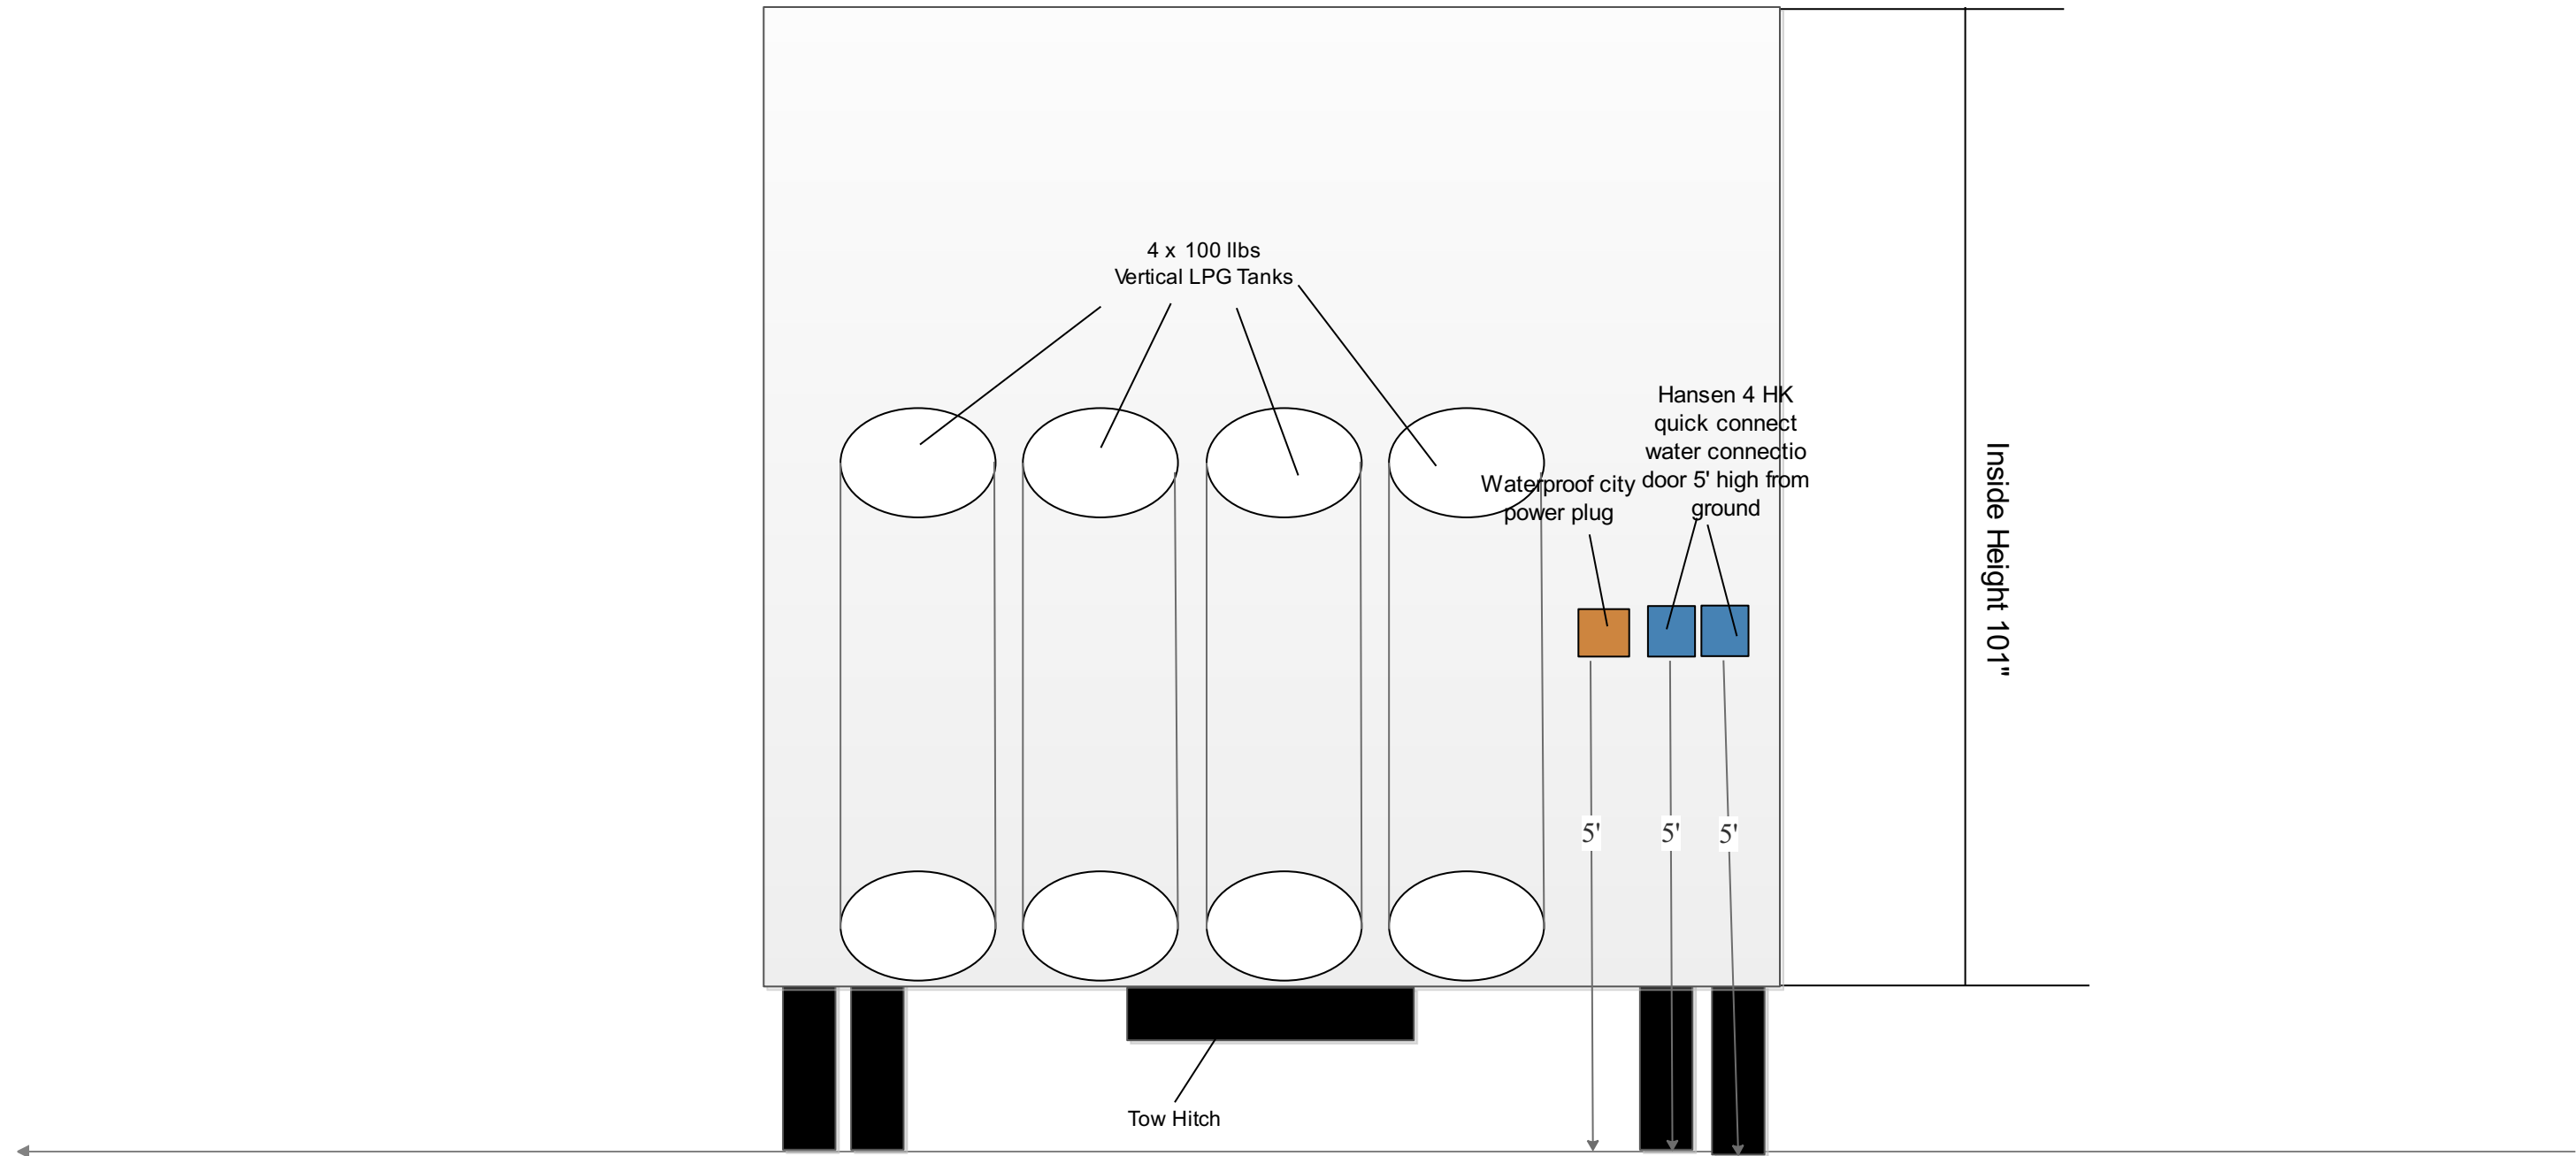

California Mobile Kitchens KT-32K Equipment		
Equipment	Model number	Serial number
Cooking Performance Group GTU-CPG-36-L Flattop Griddle 36"	351GTUCPG36L	2307005803
2 x Cooking Performance Group S60-GS24-L Liquid Propane 6 Burner 60" Range with 24" Griddle/Broiler and 2 Standard Ovens - 276,000 BTU	351S60GS24L	left: #12235837 right: #12235836
Vulcan LG300-2 35-40 lb. Liquid Propane Floor Fryer - 90,000 BTU	LG300-2	DV 1186404
Kratos 28W-153 Heated Holding Cabinet	28W-153	202403-00668
Avantco CBE-36-HC 36" 2 Drawer Refrigerated Chef Base	178CBE36HC	691075060
Cooking Performance Group FGC-200-LK Double Deck Full Size Convection Oven LP	351FGC100L	top: #1023FGCL119 bottom: #1023FGCL118
Avantco A-35F-HC 39 1/2" Solid Door Reach-In Freezer	178A35FHC	790307347
Avantco A-35R-HC 39 1/2" Solid Door Reach-In Refrigerator	178A35RHC	628513750



T.R. ARNOLD & ASSOCIATES, INC.

• Engineering • Plan Review • Inspection •

Form 401
Issued 03/21/2012
Revised 05/11/2022

INSPECTION REPORT

Work Order No. 24-01813

Manufacturer LA STAINLESS Kings Client No. 7219 Date 4/23/2024
Plant Location 8926 CUMANECHIE AVE CHATSWORTH CA
Inspector GREG EDWARDS Accompanied By: TEKLA HERVATH

Rate of Production 2 Per MONTH Labels Controlled by: ☐ Manufacturer ☒ TRA

For Office Use only

Defects Logged ☐
Red Tags Logged ☐
Inspection Logged ☐
Reviewed By _____
Comments:

Inspection Emphasis:

Structural ☐
Plumbing ☒
Heating ☐
Electrical ☒
Fire Safety ☒
Records ☐
Remedial Level: _____

Material Storage

Lumber ☐
Trusses ☐
Plywood ☐
Particleboard ☐
Insulation ☐
Doors ☒
Windows ☒

Tests Observed

Tests Observed	Pass	Fail	N/A
Gas High Pressure	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Gas Low Pressure	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Electrical Continuity	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Electrical Operational	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Electrical Polarity	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Dielectric Strength <u>NA</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Water Supply	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DWV	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Fixture	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Egress Window Operation	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Equipment	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

All Deficiencies Reinspected? Yes ☐ No ☐ N/A ☒

Labeled Yard Units Inspected? Yes ☐ No ☐ N/A ☒

Unlabeled Yard Units - Checked Status of Q.C. Records? Yes ☐ No ☐ N/A ☒

Serial # of unit tested D003347

All other units re-inspected for deviations noted on previous 402/s? Yes ☐ No ☐ N/A ☒

INSPECT AND RECORD ALL UNLABELED YARD UNITS AND DEVIATIONS ON FORM 401 & 402

STATION	SERIAL NUMBER	MODEL	APPROVAL NUMBER/DATE	DESTINATION
<u>Final</u>	<u>D003347</u>	<u>KT32K</u>	<u>VISUAL</u>	<u>9150 Harvest Way</u>
		<u>Hot Food</u>		<u>ATAS CADIZO CA</u>
		<u>Trail</u>		
				<u>VIN#</u>
				<u>70ZEN3237RD003347</u>

THIS INSIGNIA REMAINS PROPERTY OF
STATE OF CALIFORNIA DEPARTMENT OF
HOUSING AND COMMUNITY DEVELOPMENT
DIVISION OF CODES AND STANDARDS

WHEN ISSUED BY THIS INSIGNIA THE MANUFACTURER CERTIFIES TO
COMPLIANCE WITH THE CA HEALTH AND SAFETY CODE DIV. 13, PART 2
AND THE CALIFORNIA CODE OF REGULATIONS TITLE 25, CHAPTER 3 FOR SPECIAL
PURPOSE COMMERCIAL MODULAR CONSTRUCTION. A SPECIAL PURPOSE
COMMERCIAL MODULAR BEARING A DEPARTMENT INSIGNIA SHALL NOT
BE USED FOR FIRE AND LIFE SAFETY, PLUMBING, ELECTRICAL, OR
MECHANICAL EQUIPMENT OR INSTALLATIONS ALTERED OR CONVERTED
WITHOUT THE APPROVAL OF THE DEPARTMENT.



SELLER
CERTIFIES TO
COMPLIANCE

CM

40634

D003347



Form 402
Issued 03/21/2012
Revised 05/11/2022

INSPECTION OBSERVATION REPORT

MANUFACTURER AND PLANT LOCATION

Date _____

Page 2 Of 2[illegible]

issues presented and instituted procedures for
TAK/CA HCV VATH

The above report is a true and accurate account of the issues noted to the best of my knowledge.

The above report is a true and accurate account of the

B. Edwards

Inspector

Inspector

Time In 12:00 PM Time Out 2:00 PM

Inspection time 2 HRS